


Single ductless split systems

Cooling only ❄️

- Nano Platinum & Blue Enzyme Filters
- Variable Compressor Speed Inverter Technology
- Ozone-Friendly R-410A Refrigerant
- "I Feel" Fuzzy Logic Mode for Comfort Cooling
- Super-Quiet Technology – Only 19dB(A)
- Wide Airflow – Up to 150°
- Long Pipe Runs – Up to 100 ft.
- Refrigerant Pre-Charged
- Easy Installation – No Ductwork Needed
- Optional Wall-Mounted Remote Controller

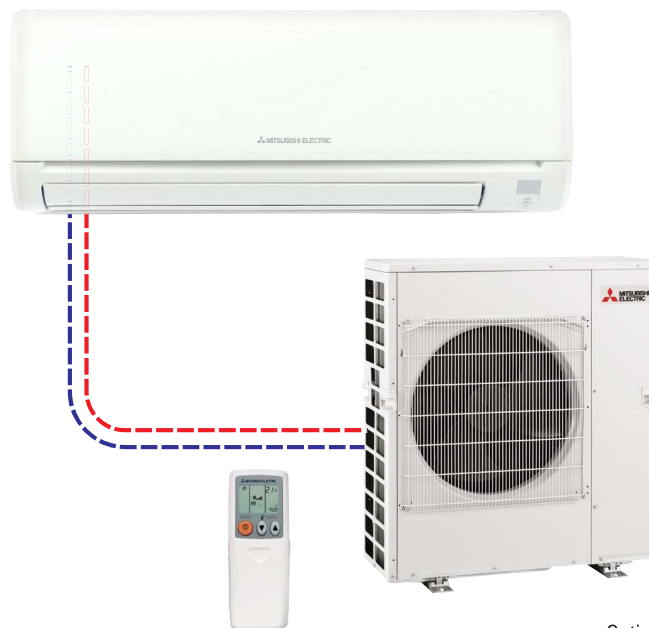

Optional accessories available.
Visit www.mrslim.ca for more information.

Model	Indoor Unit		MSY-GE09NA-8 ★	MSY-GE12NA-8 ★	MSY-GE15NA-8 ★
	Outdoor Unit		MUY-GE09NA2	MUY-GE12NA2	MUY-GE15NA2
Capacity (Rated)	Cooling	Btu/h	9,000	12,000	14,000
Capacity (Min. ~ Max.)		Btu/h	3,800 ~ 12,200	3,800 ~ 13,600	3,100 ~ 18,200
Power Consumption (Min. ~ Max.)	Cooling	W	660 (205 ~ 1,200)	960 (205 ~ 1,300)	1,080 (160 ~ 2,000)
EER	Cooling		13.6	12.5	13.6
SEER	Cooling		23.2	22.7	21.6
Capacity Control	Variable Speed Compressor (VCSI)				
Refrigerant	R-410A				
Power Supply	V, Phase, Hz		208/230, 1, 60		
Moisture Removal	Pints/h		1.5	2.5	2.7
Airflow (Q,L,M,H,SH)	CFM Dry		145-170-237-321-399	145-170-237-321-399	205-272-335-420-533
Sound Indoor (Q,L,M,H,SH)	Cooling	dB(A)	19-22-30-37-43	19-22-30-37-45	26-32-38-44-49
Sound Outdoor	Cooling	dB(A)	46	49	49
Max. Fuse Size	Indoor	A	15	15	15
(Time Delay)	Outdoor	A	15	15	15
Min. Ampacity	Indoor	A	1.0	1.0	1.0
	Outdoor	A	12	12	12
Fan Speed Control	6 (Auto, SuperHi, Hi, Med, Low, Quiet)				
Horizontal Airflow Direction	Manual				
Vertical Airflow Direction	Auto, Manual, Swing				
Air Filters (Washable)	Nano Platinum Filter, Anti-allergy Blue Enzyme Filter				
Dimension (H x W x D)	Indoor	in.	11-5/8 x 31-7/16 x 9-1/8	11-5/8 x 31-7/16 x 9-1/8	11-5/8 x 31-7/16 x 9-1/8
	Outdoor	in.	21-5/8 x 31-1/2 x 11-1/4	21-5/8 x 31-1/2 x 11-1/4	21-5/8 x 31-1/2 x 11-1/4
Weight	Indoor	lbs.	22	22	22
	Outdoor	lbs.	66	77	80
Pipe Size	Liq. X Gas	in.	1/4 x 3/8	1/4 x 3/8	1/4 x 1/2
Max. Height Difference		ft.	40	40	40
Max. Pipe Length		ft.	65	65	65
Outdoor Operating Range	Cooling		-10 – 46°C DB		
Control Features	Econo Cool • Quiet Mode • Smart Set • SuperHi Fan Speed				

★ THIS SYMBOL DENOTES AN ENERGY STAR-CERTIFIED UNIT

Q=Quiet, L=Low, M=Med, H=Hi, SH=SuperHi
All features may not apply to all models. Ask your dealer for details.



MSY-GE18NA-8		MSY-GE24NA ★		MSY-D30NA-8		MSY-D36NA-8	
MUY-GE18NA		MUY-GE24NA		MUY-D30NA-1		MUY-D36NA-1	
17,200		22,500		30,700		34,600	
3,700 ~ 18,700		8,200 ~ 31,400		9,800 ~ 30,700		9,800 ~ 34,600	
1,640 (240 ~ 2,070)		1,800 (570 ~ 3,580)		3,380 (620 ~ 3,380)		4,240 (620 ~ 4,240)	
10.5		12.5		9.1		8.2	
19.2		19.0		16.0		15.1	
Variable Speed Compressor (VCSi)				Variable Speed Compressor (VCSi)			
R-410A				R-410A			
208/230, 1, 60				208/230, 1, 60			
4.6		5.1		9.9		11.9	
230-275-339-420-533		N/A-388-469-628-738		N/A-389-639-848-887		N/A-389-639-848-887	
28-33-38-44-49		N/A-34-41-49-53		N/A-32-42-49-51		N/A-32-42-49-51	
54		55		55		56	
15		20		15		15	
15		20		25		25	
1.0		1.0		1.0		1.0	
14		17.1		21		21	
6 (Auto, SuperHi, Hi, Med, Low, Quiet)		5 (Auto, Powerful, Hi, Med, Low)		5 (Auto, Powerful, Hi, Med, Low)		5 (Auto, Powerful, Hi, Med, Low)	
Manual		Manual, Swing		Manual, Swing		Manual, Swing	
Auto, Manual, Swing				Auto, Manual, Swing			
Nano Platinum Filter, Anti-allergy Blue Enzyme Filter				Catechin Plus Air Purifying System (Catechin Plus Pre-Filter, Anti-allergy Blue Enzyme Filter)			
11-5/8 x 31-7/16 x 9-1/8		12-13/16 x 43-5/16 x 9-3/8		14-3/8 x 46-1/16 x 11-5/8		14-3/8 x 46-1/16 x 11-5/8	
33-7/16 x 33-1/16 x 13		34-5/8 x 33-1/16 x 13		33-7/16 x 33-1/16 x 13		33-7/16 x 33-1/16 x 13	
22		37		40		40	
119		119		126		126	
1/4 x 1/2		3/8 x 5/8		3/8 x 5/8		3/8 x 5/8	
50		50		50		50	
100		100		100		100	
-10 – 46°C DB				-10 – 46°C DB			
Econo Cool • Quiet Mode • Smart Set • SuperHi Fan Speed				Econo Cool • Powerful Mode • Wide Airflow			

*Includes tolerance. Typical units can operate down to -10°C depending on conditions.
 All test conditions are based on ARI 210/240.
 Rating conditions: Cooling – Indoor: 27°C DB, 19°C WB; Outdoor: 35°C DB, 24°C WB; Rated frequency

Single ductless split systems – single speed

Cooling only ❄️

- Catechin Plus Air Purifying System
- Conventional Single-Speed Compressor
- Ozone-Friendly R-410A Refrigerant
- "I Feel" Fuzzy Logic Mode for Comfort Cooling
- Super-Quiet Technology
- Connects to 115V Power Supply
- Refrigerant Pre-Charged
- Easy Installation – No Ductwork Needed



Optional accessories available.
Visit www.mrslim.ca for more information.

Model	Indoor Unit		MS-A09WA-1	MS-A12WA-1
	Outdoor Unit		MU-A09WA	MU-A12WA-1
Capacity (Rated)	Cooling	Btu/h	9,500	12,000
Power Consumption (Rated)	Cooling	W	870	1,070
EER	Cooling		10.9	11.2
SEER	Cooling		13.0	13.0
Capacity Control	Single Speed Compressor			
Refrigerant	R-410A			
Power Supply	V, Phase, Hz		115, 1, 60	
Moisture Removal	Pints/h		2.7	3.2
Airflow (Low-Med-Hi-Powerful)	CFM Dry		183-261-335-367	222-286-406-446
Sound Indoor (Low-Med-Hi-Powerful)	Cooling	dB(A)	26-32-40-42	33-38-45-47
Sound Outdoor	Cooling	dB(A)	47	52
Max. Fuse Size (Time Delay)	Indoor	A	15	15
	Outdoor	A	15	20
Min. Ampacity	Indoor	A	1.2	1.2
	Outdoor	A	14	16
Fan Speed Control	5 (Auto, Powerful, Hi, Med, Low)			
Horizontal Airflow Direction	Manual			
Vertical Airflow Direction	Auto, Manual, Swing			
Air Filters (Washable)	Catechin Plus Air Purifying System (Catechin Plus Pre-Filter, Anti-Allergy Blue Enzyme Filter)			
Dimension (H x W x D)	Indoor	in.	11-3/4 x 30-11/16 x 8-1/4	11-3/4 x 30-11/16 x 8-1/4
	Outdoor	in.	21-5/8 x 31-1/2 x 11-1/4	23-13/16 x 33-7/16 x 11-7/16
Weight	Indoor	lbs.	23	23
	Outdoor	lbs.	78	96
Pipe Size	Liq. X Gas	in.	1/4 x 3/8	1/4 x 1/2
Max. Height Difference			35	
Max. Pipe Length			65	
Outdoor Operating Range	Cooling		19 – 46°C DB	
Control Features	Econo Cool • Powerful Mode			